MACCAFERRI

CASE HISTORY Ref: USA0028—Rev:01, Issue Date 14.12.2004

DURABLE GABION RETAINING STRUCTURE

FALLS ROAD, BALTIMORE, MD, USA

RIVER BANK PROTECTION **Product:** Gabions

Problem

In June 1972, Tropical Storm Agnes came ashore along the Florida Panhandle. As it moved slowly up the eastern United States it gained strength to become a Category 1 hurricane. The 1000 mile wide depression stalled over eastern Pennsylvania. The extreme rainfall quickly caused peak watercourse discharges in excess of 100 year events, which have still not been exceeded. Water run-off was made worse as the ground had already been saturated by rain in the weeks before the hurricane.

Falls Road in Baltimore, MD runs parallel to 183 - Jones Falls Expressway. In one location, Falls Road had been washed-out by the swollen river flowing adjacent to it. A robust, economic and free-draining retaining structure was required to reinstate the highway, and protect it for the future. The structure would also have to direct the river around a curve.



Solution


City of Baltimore engineers and Maccaferri Inc, designed a gabion retaining structure with a maximum height of 27ft. Maccaferri double twisted woven steel wire mesh gabion baskets form permeable, monolithic and flexible structures. The woven mesh allows these gabions to accommodate large differential settlements without rupturing or unzipping. Although the gabion wall could accept these large settlements, the highway above could not. Therefore the gabion wall was designed with a 3ft thick mass concrete foundation.

As the wall was to be in close proximity to the water course, PVC coated gabion units were specified (In 1974, the PVC offered by Maccaferri Inc was black in color).

Specialist gabion installation contractor Gabion Construction Inc., began the installation by diverting the river to construct the concrete foundation. This project also saw the use of early geotextiles placed behind the gabion structure. The woven polypropylene textile was used to limit wash out of fine material from behind the gabion wall.


Installation of the gabions proceeded at an average rate of 16 CUY per man per day.

Client:
CITY OF BALTIMORE
Main contractor:
GABION CONSTRUCTION INC., MD
Designer:
CITY OF BALTIMORE
Products used:
GABIONS
Date of construction
JULY-SEPTEMBER 1974

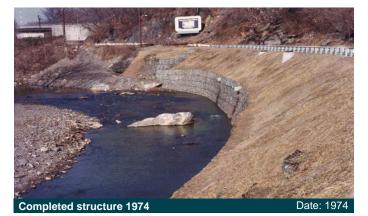

 Compared structure 188

MACCAFERRI

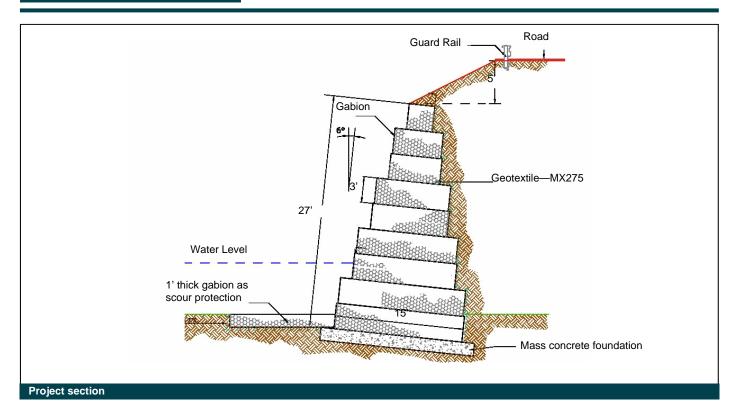

Road way drain pipes were punched through the face of the gabion wall to outfall into the watercourse. The woven gabions were easily shaped on-site to accommodate these pipes.

Gabion units were installed as an anti-scour 'apron' at the toe of the retaining wall to prevent erosion undermining the wall.

In 2004, 30 years later, Maccaferri revisited the gabion retaining wall. Samples of the PVC coated mesh were taken. Laboratory tests were carried out on the zinc coating left on the steel under the PVC, and the residual properties of the PVC after 30 years of UV and abrasion exposure.

The results were excellent. Only 35% of the initial properties of the PVC had been lost, and the amount of zinc remaining was still superior to the minimum requirement of the project specification. By comparing the 35% loss in PVC properties to recent reference results from accelerated heat aging laboratory tests, the structure has a life expectancy of around 60 years. (See Maccaferri TECHNICAL NOTE – GABION DURABILTY for more detailed information.)

Working with Maccaferri

For 125 years, Maccaferri has provided engineering expertise to clients around the world. We believe that the combination of this experience, our professionalism, design software, technical support services and our aim of providing the best products in the market, sets us apart from our competition. We hope you agree.





MACCAFERRI INC.

Headquarters—East Coast 10303 Governor Lane Blvd, Williamsport, MD 21795 Tel: 301-223-6910 Fax: 301-223-6134

E.mail: hdqtrs@maccaferri-usa.com Web site: www.maccaferri.com West Coast 3650 Seaport Blvd, West Sacramento, CA 95691 Tel: 916-371-5805 Fax: 916-371-0764